

# LightLine LED Series

CLL-T-2



## Great Features

- Up to 50% saving compared to standaard TL
- Long lifetime of 40.000 hours
- Linkable
- 120° wide beam angle
- No UV/IR Light
- CE, RoHS, DLC, SAA certification
- 5Year warranty

### Electrical Specifications

Wattage: 60W  
Power Input: AC 100-277V  
Power Factor : >0.95

### Optical Performance

Lumens: 7800lm  
CCT: 3000K – 6000K  
Luminous efficacy: 130lm/w



[www.cts-retail.nl](http://www.cts-retail.nl)



[info@cts-retail.nl](mailto:info@cts-retail.nl)




085-1042041


# Easy-Con Suspended Linear Fixture Series



T201-1

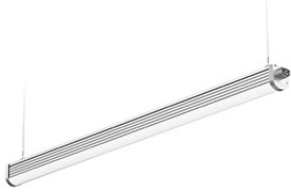

T201-1200mm

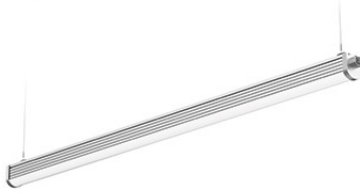

T201-1500mm



T201-1200/1500mm



Stand Alone




Continuous Run


## Product Specification

Model	Input Voltage	Power (W)	Efficacy (lm/W)	Flux (lm)	Power Factor	Beam Angle	LED Brand	CCT (K)	CRI
CLL-T20-60W12	AC100-277V	60	130±5	7800±300	0.95	120°	336pcs 0.5W SMD2835	3000 4000	>80
CLL-T20-60W15	50~60Hz	60	130±5	7800±300			336pcs 0.5W SMD2835	5000 6000	

### Product Dimension

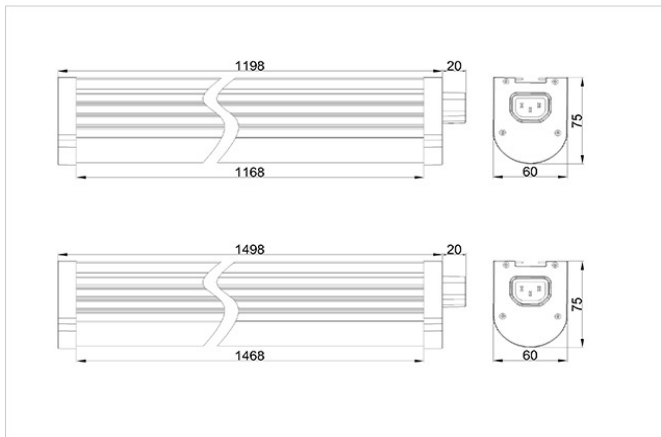

### Light Distribution Curve

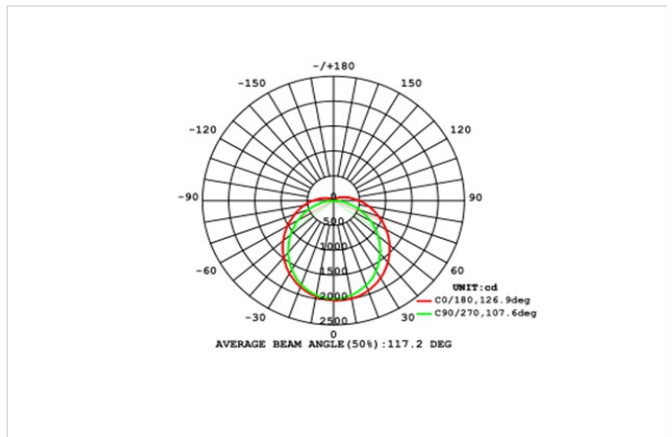

[www.cts-retail.nl](http://www.cts-retail.nl)



[info@cts-retail.nl](mailto:info@cts-retail.nl)



085-1042041